

## LVA 2500 4-quadrant amplifier

**AUTOMOTIVE SUPPLY SIMULATION  
AT IT'S BEST**



*Example: LVA 1000 Front panel*

- ✓ Extremely low harmonic distortion - even under very non-linear load conditions
- ✓ Very fast slew rate > 20V/μs
- ✓ Operates from DC up to 100kHz large signal bandwidth (-3dB)
- ✓ Small signal bandwidth up to 300kHz
- ✓ High short-term overload characteristic (for 30s)
- ✓ Very high peak-load ability (up to 200ms)
- ✓ Programmable internal resistance 0 ... 200mΩ
- ✓ Sink operation mode can be disabled
- ✓ Touch panel operation 7" 800x480
- ✓ Optional overvoltage protection device OPD

*The relating standards:*

*ISO 7637-2/-3*

*ISO 16750-2*

*ISO 21848*

*LV 124*

*VDA 320 (LV 148)*

*SAE J 1113-11*

*BMW GS 95002*

*BMW GS 95003-2*

*BMW GS 95024-2-2*

*BMW GS 95026*

*DaimlerChrysler DO-10615*

*Fiat 9.90110*

*Ford FMC 1278*

*General Motors GMW 3097*

*JLR-EMC-CSv1.2*

*Mercedes-Benz MBN*

*LV124-1*

*PSA B21 7110*

*Renault 36-00-808/--M*

*VW TL 81000*


*VW 80000*

*VW 82148*


**THE REFERENCE SOURCE FOR AUTOMOTIVE APPLICATIONS**

**AMPLIFIER CHARACTERISTIC – OUTPUT CURRENT CAPABILITY**

**20V Range continuous current  $I_{cont}$ : LVA2500**

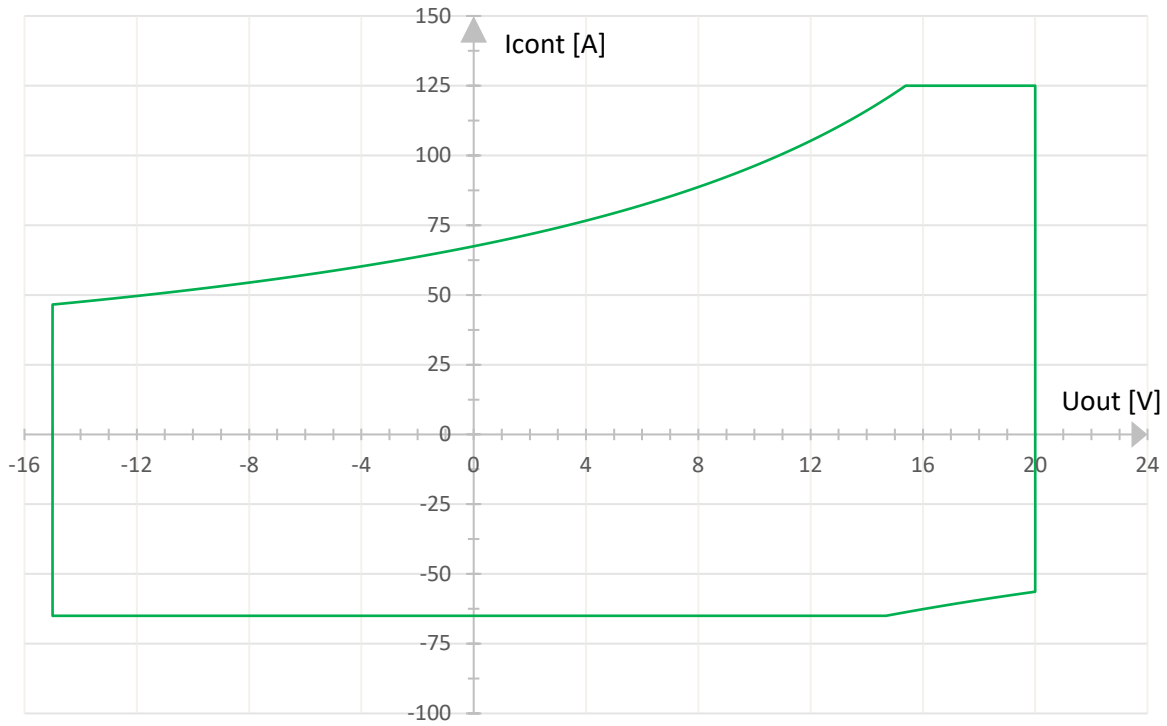


**20V Range short-time current  $I_{short}$ : LVA2500**

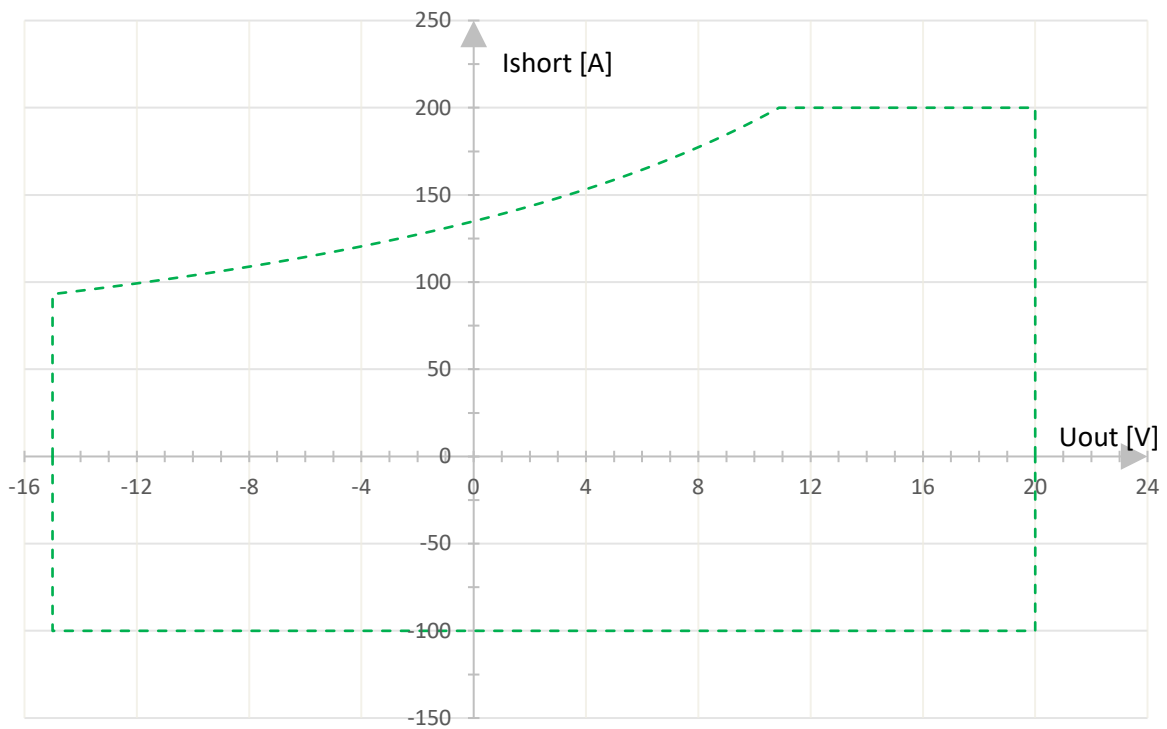


### AMPLIFIER CHARACTERISTIC – OUTPUT CURRENT CAPABILITY

**36V Range continuous current  $I_{cont}$ : LVA2500**

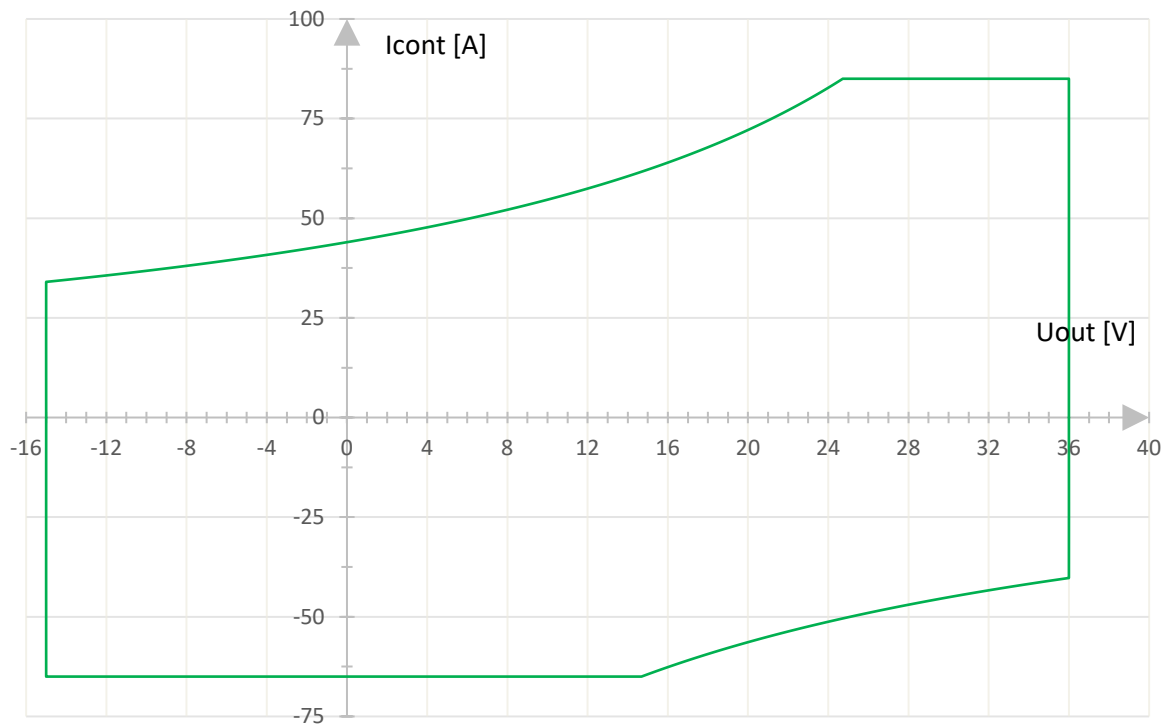


**36V Range short-time current  $I_{short}$ : LVA2500**

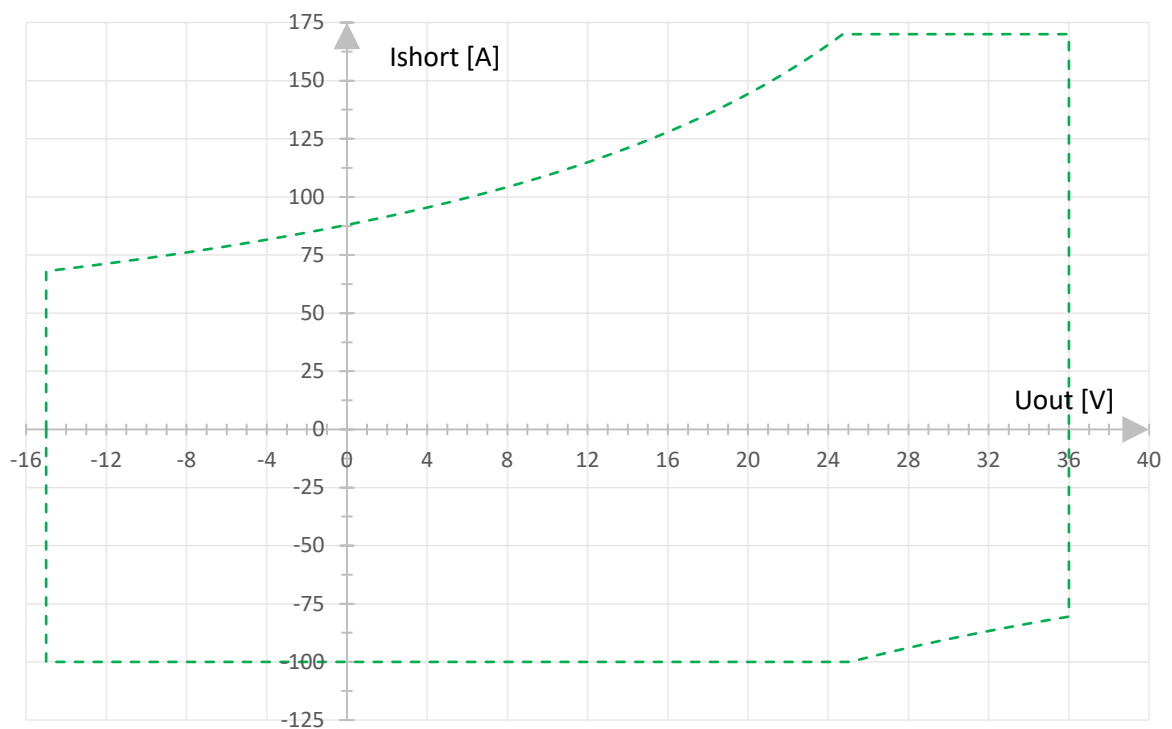


### AMPLIFIER CHARACTERISTIC – OUTPUT CURRENT CAPABILITY

54V Range continuous current  $I_{cont}$ : LVA2500

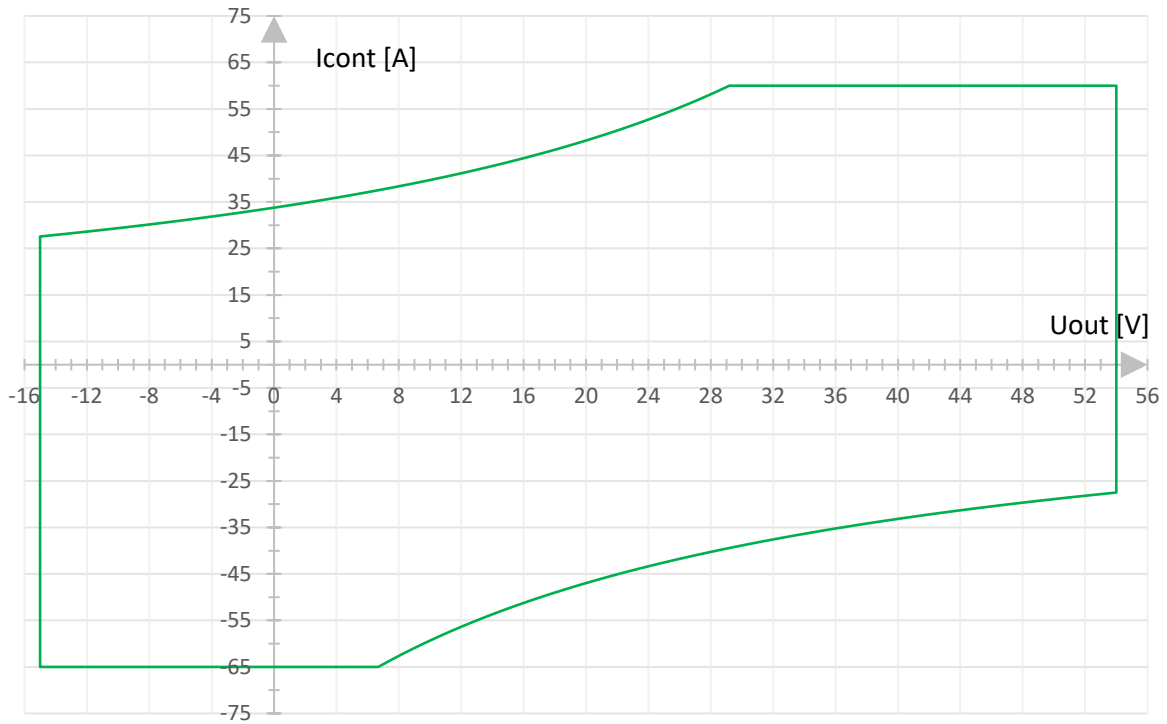


54V Range short-time current  $I_{short}$ : LVA2500

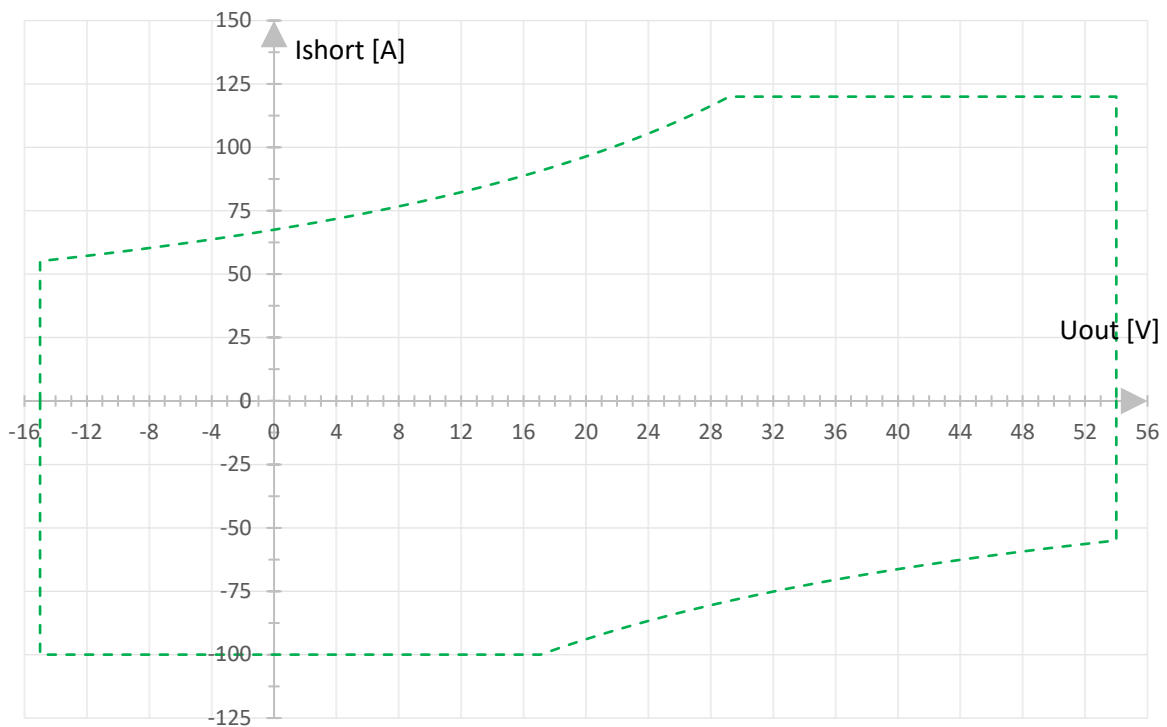


### AMPLIFIER CHARACTERISTIC – OUTPUT CURRENT CAPABILITY

70V Range continuous current  $I_{cont}$ : **LVA2500**

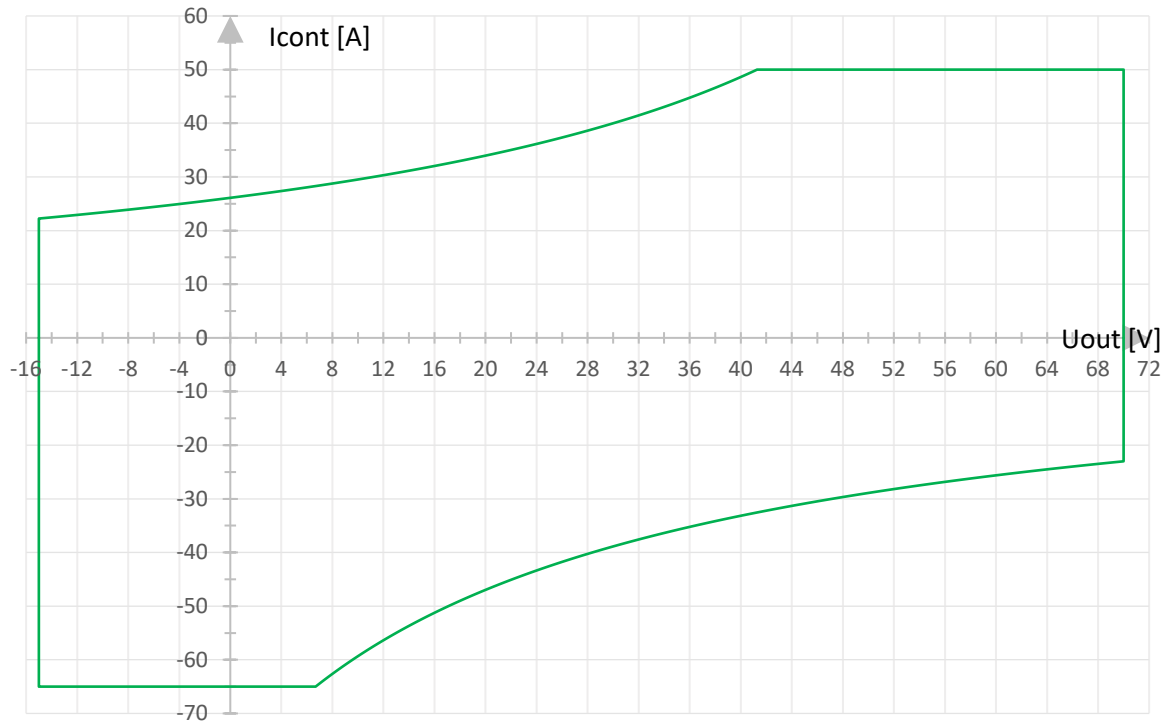

70V Range short-time current  $I_{short}$ : **LVA2500**

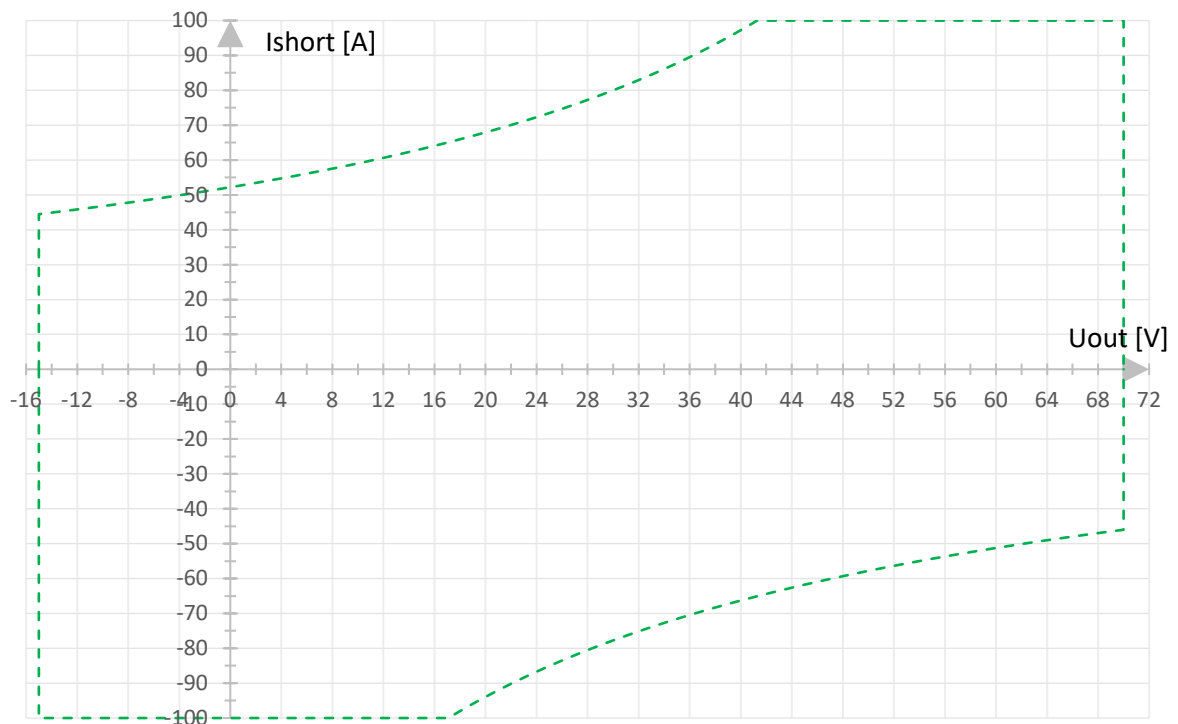

## TECHNICAL DATA

|   |                                     |  |
|---|-------------------------------------|--|
| Max. peak current capability<br>(up to 200ms)       |                                     | 300A <sub>p</sub>  |
| Continuous and short-time output current capability |                                     | range depending<br>see diagrams  |
| <b>Nominal voltage ranges</b>                       |                                     | U <sub>1</sub> : -15V <sub>DC</sub> ... 20V <sub>DC</sub><br>U <sub>2</sub> : -15V <sub>DC</sub> ... 36V <sub>DC</sub><br>U <sub>3</sub> : -15V <sub>DC</sub> ... 54V <sub>DC</sub><br>U <sub>4</sub> : -15V <sub>DC</sub> ... 70V <sub>DC</sub> |
| <b>Digital instrument</b>                           | Voltage range                       | Autoranging (20/40/80V <sub>DC</sub> Ranges)   |
|   | Current range                       | 37.5A / 75A / 150A / 300A  |
| Accuracy Voltage                                    |                                     | DC: 1000ppm of reading / 200ppm of range value   |
| Accuracy Current                                    |                                     | DC: 2000ppm of reading / 400ppm of range value   |
| <b>Supply</b>                                       | Power Supply                        | 230V/400V (±10%, 50/60Hz)  |
|   | Protection                          | 16A  |
|   | Connector type                      | CEE  |
| <b>Housing</b>                                      |                                     | 19"-rack, colour light grey (RAL 7035)   |
| Dimensions (mm)                                     |                                     | LVA: 222x483x700 5U<br>Power Supply: 267x483x700 6U  |
| Weight  |                                     | LVA integrated in 24" rack: approx. 40kg<br>LVA integrated in 37" rack: approx. 120kg  |
| <b>General</b>                                      | Voltage adjustment                  | Touch panel / Remote / External input  |
|   | Load regulation: 0 ... nominal load | max. 0.2%, typ. <0.1%  |
|   | Internal resistance compensation    | DC ... 1kHz (-3dB)   |
|   | Frequency range (no load)           | DC ... 100kHz large signal bandwidth (-3dB)<br>DC ... 300kHz small signal bandwidth (10% of range, -3dB)   |
|   | Noise at output                     | <5mV <sub>rms</sub> (<100kHz), <10mV <sub>rms</sub> (100kHz - 20MHz)   |
|   | Slew rate                           | SR: >20V/μs  |
|   | Adjustable current limitation       | Accuracy see current measurement unit<br>response time < 20μs  |
| Floating output                                     |                                     | Max. voltage between earth and amplifier output ground:<br>300V <sub>rms</sub>   |
| <b>Internal control oscillator</b>                  | Type                                | 4-channel synthesizer  |
|   | Wave form                           | DC, Sine, Rectangle, Triangle, DC Offset, Arbitrary  |
|   | Amplitude resolution                | 17Bit  |
|   | Frequency range                     | DC ... 1MHz  |
|   | Frequency resolution                | 1μHz   |
|   | Frequency accuracy                  | 25ppm  |
|   | Memory depth                        | 1MSample   |
|   | Synth functions                     | ADD, AM, FM, PM  |
|   | Sequence memory                     | 1024 steps   |
|   | External floating input             | 0 ... V <sub>ExtMax</sub> (V <sub>ExtMax</sub> is adjustable between ±2V <sub>p</sub> ... ±25V <sub>p</sub> )  |
|   | Digital I/O                         | 8 digital inputs +5V <sub>DC</sub> ... +24V <sub>DC</sub><br>8 digital outputs +5V <sub>DC</sub> , I <sub>L</sub> =40mA<br>(external V <sub>CC</sub> input: +5V <sub>DC</sub> ... +24V <sub>DC</sub> , I <sub>L</sub> =500mA)                    |

| Monitoring unit <sup>2)</sup>         | voltage  | current                               |
|---------------------------------------|--|---------------------------------------|
| Max. output                           |  | ±10V <sub>p</sub>                     |
| Scaling factor (adjustable)           | 0.2 ... 1000   | 0.1 ... 1000                          |
| Bandwidth                             | 300kHz   | 200kHz                                |
| Accuracy                              |  | 0.3%                                  |
| Noise of ADC measurement              | <20mV <sub>rms</sub> (DC ... 300kHz)                                   | <1.5mA <sub>rms</sub> (DC ... 300kHz) |
| Noise DAC output                      | <0.2mV <sub>rms</sub> (DC ... 300kHz)                                  |                                       |
| Delay time                            | <1µs   |                                       |
| Output impedance                      | 220Ohm   |                                       |
| Isolation                             | earth / remaining electronics / each other                             |                                       |
| Protection                            | short circuit  |                                       |
| Insulation resistance                 | >1MOhm   |                                       |
| Withstand voltage                     | >2000V <sub>DC</sub>   |                                       |
| Ambient temperature                   | 0°C up to 40°C   |                                       |
| Relative Humidity<br>(non-condensing) | max. 80% for temperatures <31°C,<br>decreasing linearly to 50% at 40°C |                                       |
| System of protection                  | IP20   |                                       |

## LVA 2500 AMPLIFIER – OPTIONS

|               |  |
|---------------|--|
| OPT.01        | IEEE 488 Interface   |
| OPT.02        | RS 232 Interface (instead of IEEE 488 Interface)   |
| OPT.05        | Output voltage and current monitor (electrically isolated)<br>Probe ratio free adjustable  |
| NT.11.70S.2K5 | Symmetrical voltage range (for magnetic field tests)<br>V:0 ... ± 70V <sub>DC</sub> / I <sub>DC,cont</sub> :20 A <sub>DC</sub> / I <sub>DC,short</sub> :25 A <sub>DC</sub> |
| OPT.24.02     | Programmable internal resistance<br>R:0mΩ ... 200.0mΩ / Accuracy: ±1% of range   |
| OPT.25.02     | Constant current mode  |
| OPD.02        | Overvoltage Protection Device  |

The LVA is also available as LVA 1000, LVA 5000 and LVA 7500 version.